

SECURE SMITH JR

User Hand Book

Name : _____

Address : _____

System Model : SSJR 22 (16A)
 SSJR 22 (8A)

System Description


Security Zone

Zone	Description	24hr	Home	P.1	P.2	P.3
1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

G-loop Automation

ID	Description / Location

Turn On/Off Panel

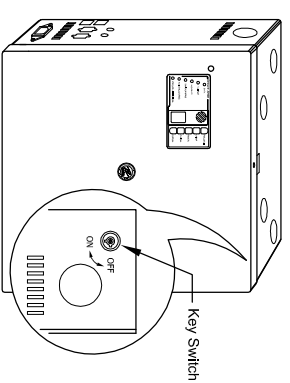

JR LED Keypad - Shortcut Button

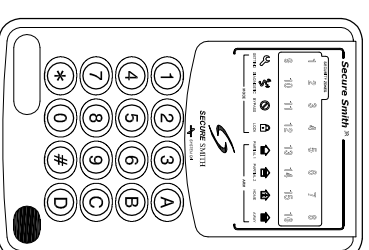


Table: Long Press Shortcut Button

Legend	Description	Legend	Description	Legend	Description	Legend	Description
1	Arm Away Mode	2	On G-loop 1	3	Off G-loop 1	A	Panic Button
4	Arm Home Mode	5	On G-loop 2	6	Off G-loop 2	B	Diagnostic Mode
7	Arm Partial Mode 1	8	On G-loop 3	9	Off G-loop 3	C	Cancel / Exit
*	Arm Partial Mode 2	0	On G-loop 4	#	Off G-loop 4	D	Enter

Operation via Remote Fob

Each button, labeled as A, B, C and D carries specific functions that are not inter-changeable. Every button is assigned to carry two individual functions: activated by either SHORT press (press and release immediately) or LONG press (press, hold for 2 seconds and release).

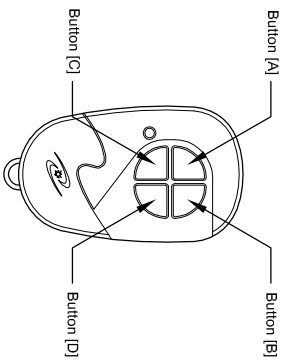


Table: Remote Fob Buttons

Button	Command Description
A	SHORT PRESS: Arm Away Mode LONG PRESS: On/Off G-lop 1
B	SHORT PRESS: Disarm Alarm LONG PRESS: On/Off G-lop 2
C	SHORT PRESS: Arm Home Mode LONG PRESS: On/Off G-lop 3
D	SHORT PRESS: Panic Alarm LONG PRESS: On/Off G-lop 4

Table: Remote Fob Button Press Method


Method	Command Description
Short Press	(Immediately)
Long Press	(Hold for 2 sec)

Operation Code via Phone

Table: Operation Command Via Phone

Index	Description	Command	Remark
1	Arm Away Mode	[0] + [0] + [#] + [1]	
2	Arm Home Mode	[0] + [1] + [#] + [1]	
3	Arm Partial Arm Mode 1	[0] + [2] + [#] + [1]	
4	Arm Partial Arm Mode 2	[0] + [3] + [#] + [1]	
5	Disarm Alarm	[0] + [0] + [#] + [2]	
6	On Siren	[0] + [0] + [#] + [3]	
7	Off Siren	[0] + [0] + [#] + [4]	
8	Check System Arm Status	[*] + [*] + [0] + [1]	
9	Check Siren Status	[*] + [*] + [0] + [2]	
10	Check Strobe Light Status	[*] + [*] + [0] + [3]	
11	Check Security Zone Status	[*] + [#] + [Z1] + [Z2]	[Z1] + [Z2] = Zone Number (01-16)
12	Turn On G-lop Automation	[*] + [0] + [Z] + [*]	[Z] = Automation Number (1-4)
13	Turn Off G-lop Automation	[*] + [0] + [Z] + [#]	[Z] = Automation Number (1-4)
14	Disconnect Call	[0] + [0] + [#] + [9]	

System Alert Call-out Chart

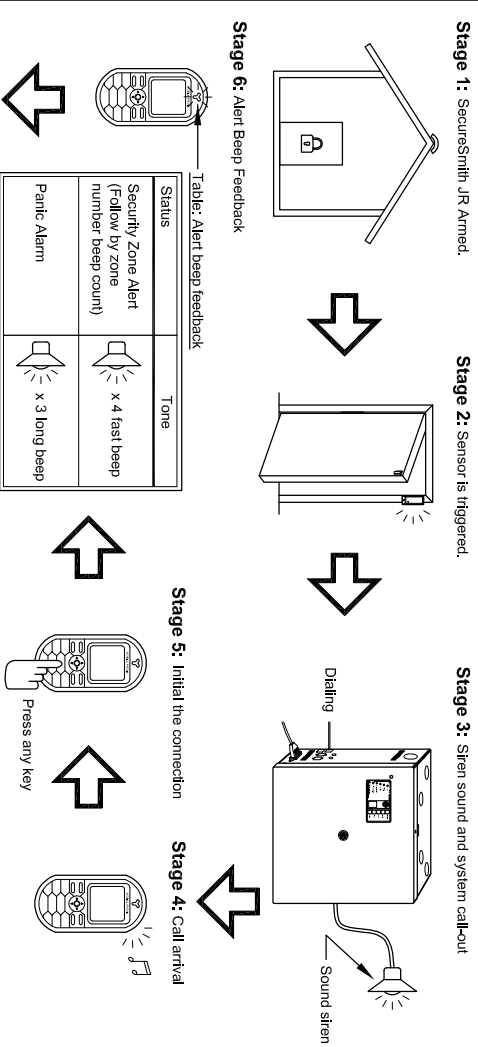

Stage 1: Securesmith JR Armed.

Stage 2: Sensor is triggered.

Stage 3: Siren sound and system call-out

Stage 4: Call arrival

Stage 5: Initial the connection

Stage 6: Alert Beep Feedback


Stage 7: Operating System

Stage 8: Disconnect Call

Enter Operation Command (Example [0] + [0] + [#] + [2] to disarm; Kindly refer to Table: Operation Command via Phone.)

Press [0] + [0] + [#] + [9] for disconnect call

Remote Call-in Chart

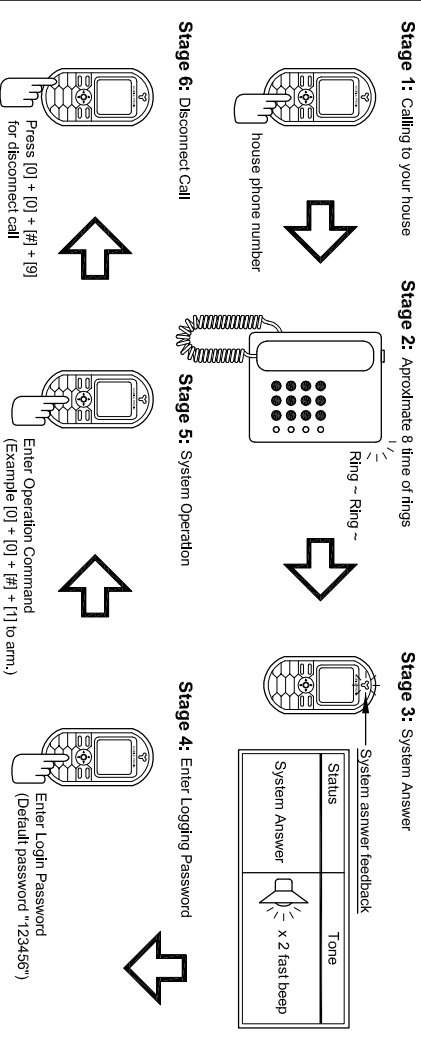

Stage 1: Calling to your house

Stage 2: Approximate 8 time of rings

Stage 3: System Answer

Stage 4: Enter Logging Password

Stage 5: System Operation

Stage 6: Disconnect Call

NOTE The system will hang-up after 120 seconds if no valid operation command is received.

NOTE The system will hang up automatically after 3 unsuccessful login password or after 120 seconds if no valid login password is received; whichever comes first.